



Hisense Sero 7 Pro GPS Antenna Replacement

Replace the GPS antenna in your Hisense Sero 7 Pro.

Written By: Baochau Nguyen



INTRODUCTION


This guide will assist the user in replacing the GPS antenna in the Hisense Sero 7 Pro tablet.




TOOLS:

- [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — GPS Antenna

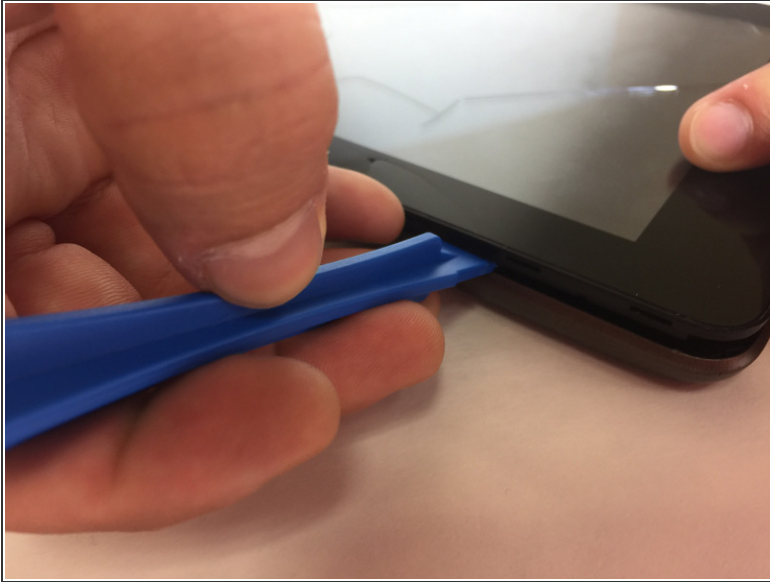

 Turn tablet off before disassembling it.

 Use caution when handling device if screen is cracked.

- Using a plastic opening tool, pry open the back cover from the tablet.



 An extra set of hands may be required.

Step 2



- Pull the Wi-Fi antenna directly upwards to remove it from the motherboard.
- ❗ Be gentle when disconnecting the antenna because it may damage the part it is attached to.

Step 3

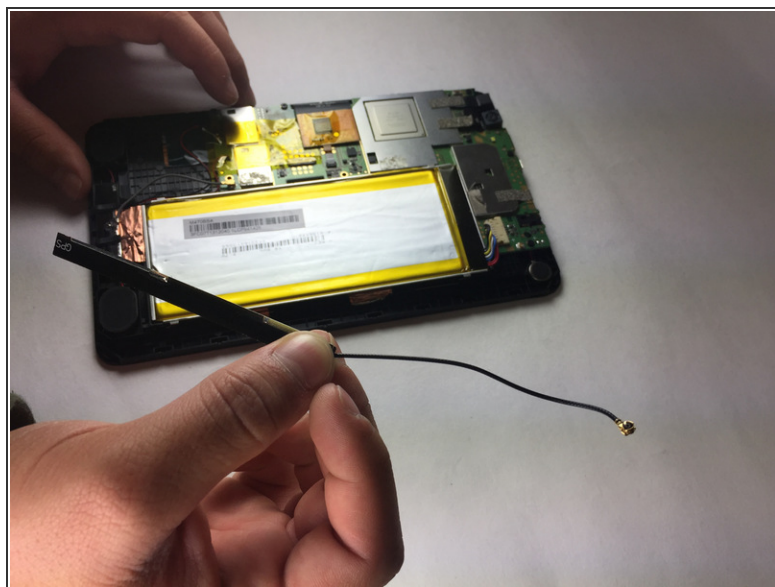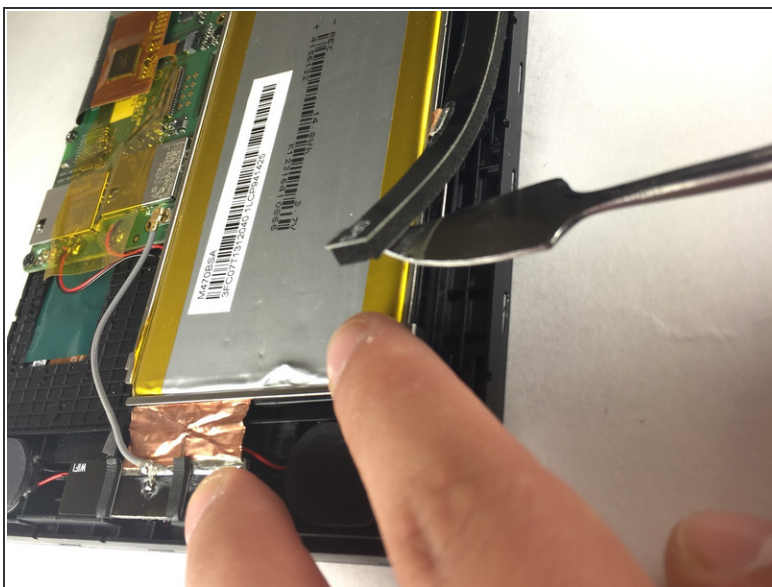

- Insert a metal or nylon spudger on the edge of the GPS satellite and begin separating it from the adhesive.
- Slowly peel the GPS from left to right as the GPS is clammy.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 12:45:06 AM.